

Palm grip B32



The palm grip B32 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1mm², 450mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12mm (standard) or 10mm.

Technical data




| | |
|-----------------------|-----------------------------------|
| Operating temperature | -40°C to +60°C |
| Degree of protection | IP65 |
| Contact complement | 1,5A 24V DC 13 (*1 0,1A 24V DC13) |




| | B32L | Example - 2D | W | SE | S12 | - X |
|-----------------------------------|--|-----------------|---|----|-----|-----|
| Basic unit | | | | | | |
| B32L | Palm grip left | | | | | |
| B32R | Palm grip right | | | | | |
| Digitale actuating element | | | | | | |
| D | Push button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange | | | | | |
| HD | Hall-push button (see page 144) | | | | | |
| W | Rocker switch T-0-T | | | | | |
| W | Rocker switch 0-T | | | | | |
| W | Rocker switch R-0-T | | | | | |
| W | Rocker switch R-0-R | | | | | |
| W | Rocker switch 0-R | | | | | |
| W | Rocker switch R-R | | | | | |
| SE | Sensor button capacitive with external control electronics | | | | | |
| S | Sensor button capacitive without external control electronics (Consistent with V85/VV85 and V25 with interface E3xx+E4xx+E5xx+E6xx) | | | | | |
| Analog actuating element | | | | | | |
| S12 | Hall-Thumb rocker (see page 122) Output 0,5...2,5...4,5V inverse dual | | | | | |
| V21 | Hall-minijoystick (see page 61) Output 0,5...2,5...4,5V inverse dual | | | | | |
| Special model | | | | | | |
| X | Special / customer specified | | | | | |

B32


Push button
installed Pos. 1 - 8, 11 - 13
Rocker switch
installed Pos.9

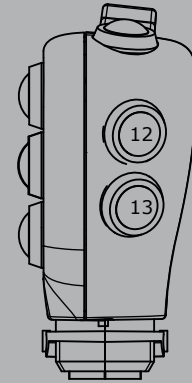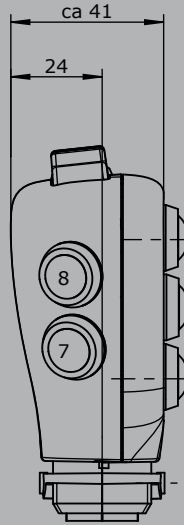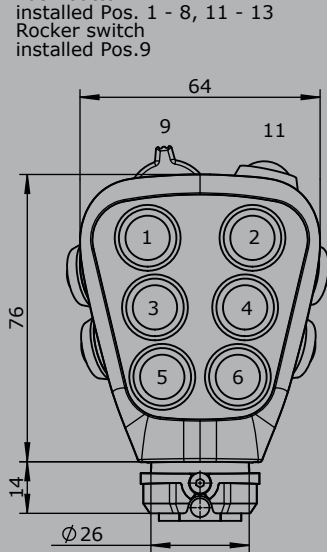


Push button
installed Pos. 1 - 8, 12 + 13
Rocker switch lengthwise
installed Pos. 10

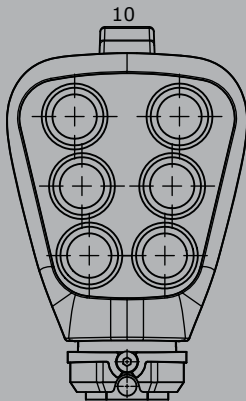


Rocker switch crosswise
installed Pos. 10

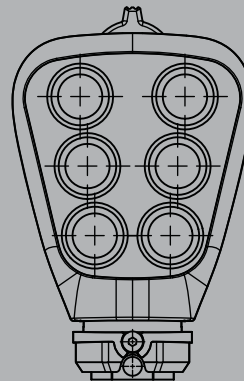

Edition:
Multi-axis controller V21
installed Pos. 1/3
(Pos. 9 - 11 not available)



Edition:
Rocker switch
installed Pos. 5/6



Edition:
Rocker switch
installed Pos.1/3 + 2/4
(Pos. 9 - 11 not available)

