


Incremental encoders

Standard
sine wave output, SIL2/PLd, optical

Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft)

SinCos

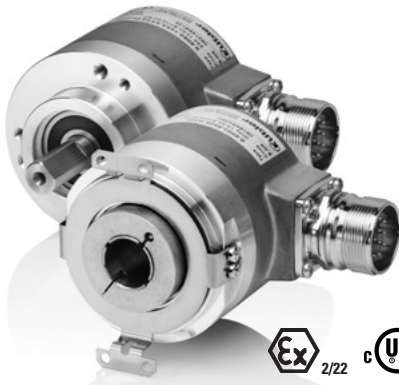

The incremental encoders 5814FS2 and 5834FS2 of the Sendix SIL family are suited for use in safety-related applications up to SIL2 according to EN 61800-5-2 or PLd to EN ISO 13849-1.

These encoders are particularly suited for applications in the field of safe drive technology.



Safety-Lock™



High rotational speed



Temperature range



High protection level



High shaft load capacity




Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



SinCos



Optical sensor

Functional Safety

- Encoder with individual certificate from IFA / TÜV.
- Suitable for applications up to SIL2 acc. to EN 61800-5-2.
- Suitable for applications up to PLd acc. to EN ISO 13849-1.
- With incremental SinCos tracks.
- Certified mechanical mounting + electronic.

Flexible

- Shaft and hollow shaft versions.
- Cable and connector variants.
- Various mounting options available.

Order code

8.5814FS2 . 1 XXXX . XXXX

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat
A = 10 x 20 mm [0.39 x 0.79"], with feather key

c Output circuit / power supply

1 = SinCos / 5 V DC
2 = SinCos / 10 ... 30 V DC

d Type of connection

1 = axial cable, 1 m [3.28'] PVC
A = axial cable, special length PVC *)
2 = radial cable, 1 m [3.28'] PVC
B = radial cable, special length PVC *)
3 = axial M23 connector, 12-pin
4 = radial M23 connector, 12-pin
5 = axial M12 connector, 8-pin
6 = radial M12 connector, 8-pin

*) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.5814FS2.122A.2048.0030 (for cable length 3 m)

e Pulse rate

1024, 2048

Optional on request
- Ex 2/22 ¹⁾

1) For the cable connection type, cable material PUR.

Incremental encoders

| | | |
|--|--|---------------|
| Standard sine wave output, SIL2/PLd, optical | Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft) | SinCos |
|--|--|---------------|

| | | | | |
|--|---|---|---|--|
| Order code Hollow shaft | 8.5834FS2 Type | .XXXXX a b c d e | <p>If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.</p> | 10 By 10 |
| a Flange 9 = with torque stop, flexible, IP65 A = with torque stop set, rigid, IP65 <u>B = with stator coupling, IP65, ø 63 mm [2.48"]</u> | b Through hollow shaft 3 = ø 10 mm [0.39"] <u>4 = ø 12 mm [0.47"]</u> 5 = ø 14 mm [0.55"] Tapered shaft K = ø 10 mm [0.39"] | c Output circuit / power supply 1 = SinCos / 5 V DC <u>2 = SinCos / 10 ... 30 V DC</u> | d Type of connection 2 = radial cable, 1 m [3.28'] PVC B = radial cable, special length PVC *) E = tangential cable, 1 m [3.28'] PVC F = tangential cable, special length PVC *) <u>4 = radial M23 connector, 12-pin</u> 6 = radial M12 connector, 8-pin *) Available special lengths (connection types B, F): 2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5834FS2.B42B.2048.0030 (for cable length 3 m) | e Pulse rate 1024, <u>2048</u> <i>Optional on request</i> - Ex 2/22 (not for connection type E + F) ¹⁾ |

| Accessories | | Order no. |
|--|---|-------------------------|
| EMC shield terminal | for top-hat rail mounting | 8.0000.4G06.0000 |
| Screw retention | Loctite 243, 5 ml | 8.0000.4G05.0000 |
| Bellows coupling, safety-oriented | You will find an overview of our couplings for Sendix SIL shaft encoders in the accessories section or under www.kuebler.com/accessories . | |
| Safety modules Safety-M compact / modular | You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under www.kuebler.com/safety . | |

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.

| Connection technology | | Order no. |
|--|---|-----------------------------|
| Cordset, pre-assembled | M12 female connector with coupling nut, 8-pin 2 m [6.56'] PVC cable ²⁾ | 05.00.6041.8211.002M |
| | M23 female connector with coupling nut, 12-pin 2 m [6.56'] PVC cable ²⁾ | 8.0000.6901.0002 |
| Connector, self-assembly (straight) | M12 female connector with coupling nut, 8-pin | 05.CMB 8181-0 |
| | M23 female connector with coupling nut, 12-pin | 8.0000.5012.0000 |

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

| Technical data | | | | | | | | | | | |
|---|--|-----------------------|------------|-------------------------|--------------------|--|---|---|----------|---------------------------|---|
| Notes regarding "Functional Safety" | Safety characteristics | | | | | | | | | | |
| These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality. Additional functions can be found in the operating manual. | <table border="1"> <tr> <td>Classification</td> <td>PLd / SIL2</td> </tr> <tr> <td>System structure</td> <td>2 channel (Cat. 3)</td> </tr> <tr> <td>PFH_d value ³⁾</td> <td>2.16 x 10⁻⁸ h⁻¹</td> </tr> <tr> <td>Mission time / Proof test interval</td> <td>20 years</td> </tr> <tr> <td>Relevant standards</td> <td>EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007</td> </tr> </table> | Classification | PLd / SIL2 | System structure | 2 channel (Cat. 3) | PFH_d value ³⁾ | 2.16 x 10 ⁻⁸ h ⁻¹ | Mission time / Proof test interval | 20 years | Relevant standards | EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007 |
| Classification | PLd / SIL2 | | | | | | | | | | |
| System structure | 2 channel (Cat. 3) | | | | | | | | | | |
| PFH_d value ³⁾ | 2.16 x 10 ⁻⁸ h ⁻¹ | | | | | | | | | | |
| Mission time / Proof test interval | 20 years | | | | | | | | | | |
| Relevant standards | EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007 | | | | | | | | | | |

1) For the cable connection type, cable material PUR.
2) Other lengths available.
3) The specified value is based on a diagnostic coverage of 90 %, that must be achieved with an encoder evaluation unit.
The encoder evaluation unit must meet at least the requirements for SIL2.

Incremental encoders

Incremental encoders

| | | |
|---|--|---------------|
| Standard sine wave output, SIL2/PLd, optical | Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft) | SinCos |
|---|--|---------------|

| Mechanical characteristics | | |
|--|------------------------|--|
| Maximum speed, shaft version | up to 70°C [158°F] | 12000 min ⁻¹ , 10000 min ⁻¹ (continuous) |
| | up to T _{max} | 8000 min ⁻¹ , 5000 min ⁻¹ (continuous) |
| Maximum speed, hollow shaft version | up to 70°C [158°F] | 9000 min ⁻¹ , 6000 min ⁻¹ (continuous) |
| | up to T _{max} | 6000 min ⁻¹ , 3000 min ⁻¹ (continuous) |
| Starting torque – at 20°C [68°F] | shaft version | < 0.01 Nm |
| | hollow shaft version | < 0.03 Nm |
| Mass moment of inertia | shaft version | 4.0 x 10 ⁻⁶ kgm ² |
| | hollow shaft version | 7.0 x 10 ⁻⁶ kgm ² |
| Insertion depth for shaft | hollow shaft version | min. 34 mm [1.34"] |
| Load capacity of shaft | radial | 80 N |
| | axial | 40 N |
| Weight | | approx. 0.45 kg [15.87 oz] |
| Protection acc. to EN 60529 | | IP65 |
| Working temperature range | | -40°C ... +90°C [-40°F ... +194°F] ¹⁾ |
| Materials | shaft / hollow shaft | stainless steel |
| | flange | aluminum |
| | housing | zinc die-cast |
| | cable | PVC (PUR for Ex 2/22) |
| Shock resistance acc. to EN 60068-2-27 | | 500 m/s ² , 11 ms |
| Vibration resistance acc. to EN 60068-2-6 | | 200 m/s ² , 10 ... 150 Hz |

| Electrical characteristics | |
|--|---|
| Power supply | 5 V DC (±5 %) or 10 ... 30 V DC |
| Power consumption (no load) | 5 V DC max. 70 mA |
| | 10 ... 30 V DC max. 45 mA |
| Reverse polarity protection of the power supply | yes |
| Short circuit proof outputs | yes ²⁾ |
| UL approval | file 224618 |
| CE compliant acc. to | EMC guideline 2014/30/EU Machinery directive 2006/42/EC RoHS guideline 2011/65/EU |

| EMC | |
|---------------------------|---|
| Relevant standards | EN 55011 class B:2009 / A1:2010 EN 61000-6-3:2007 / A1:2011 EN 61000-6-2:2005 |

| SinCos interface | |
|----------------------------|---------------------------|
| Max. frequency -3dB | 400 kHz |
| Signal level | 1 V _{pp} (±10 %) |
| Short circuit proof | yes ²⁾ |
| Pulse rate | 1024 / 2048 ppr |

Terminal assignment


| Output circuit | Type of connection | Cable (isolate unused wires individually before initial start-up) | | | | | | | |
|----------------|--------------------|---|-----|----|----|-----------|----|-----------|------------------|
| 1, 2 | 1, 2, A, B, E, F | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Cable color: | WH | BN | GN | YE | GY | PK | shield |
| Output circuit | Type of connection | M23 connector, 12-pin | | | | | | | |
| 1, 2 | 3, 4 | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Pin: | 10 | 12 | 5 | 6 | 8 | 1 | PH ³⁾ |
| Output circuit | Type of connection | M12 connector, 8-pin | | | | | | | |
| 1, 2 | 5, 6 | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Pin: | 1 | 2 | 3 | 4 | 5 | 6 | PH ³⁾ |

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- A, \bar{A} : Cosine signal
- B, \bar{B} : Sine signal
- PH \perp : Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8-pin



M23 connector, 12-pin

1) Cable version: -30°C ... +90°C [-22°F ... +194°F] fixed installation.
 2) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied.
 3) PH \perp = shield is attached to connector housing.

Incremental encoders



| | | |
|--|--|---------------|
| Standard sine wave output, SIL2/PLd, optical | Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft) | SinCos |
|--|--|---------------|

Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, \varnothing 58 [2.28]
Flange type 1 with shaft type 2
 (drawing with cable)



- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

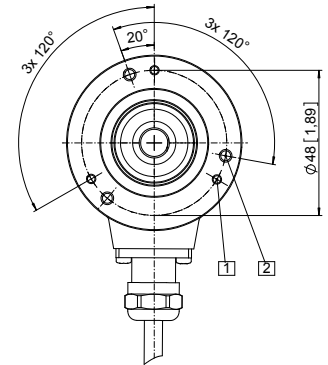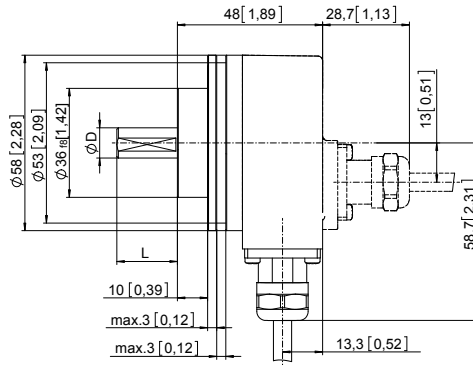

| D | Fit | L |
|-----------|-----|-----------|
| 10 [0.39] | f7 | 20 [0.79] |

Clamping flange, \varnothing 58 [2.28]
Flange type 1 with shaft type A
 (drawing with M23 connector)



- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6

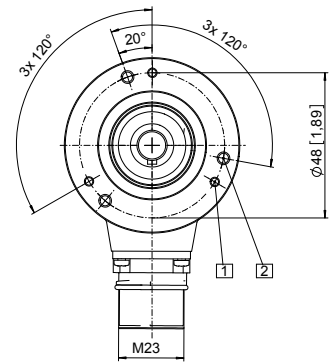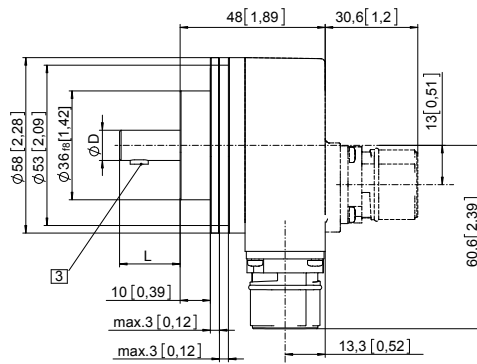

| D | Fit | L |
|-----------|-----|-----------|
| 10 [0.39] | f7 | 20 [0.79] |

(drawing with M12 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6

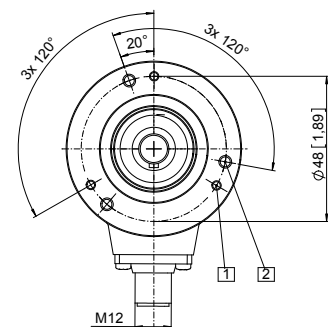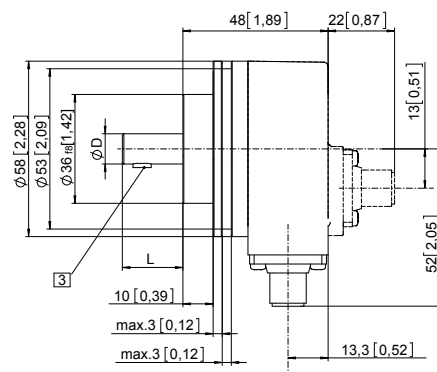

| D | Fit | L |
|-----------|-----|-----------|
| 10 [0.39] | f7 | 20 [0.79] |

Incremental encoders

Standard
sine wave output, SIL2/PLd, optical

Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft)



SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with torque stop set, rigid
Flange type A
Through hollow shaft
(drawing with cable)



- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

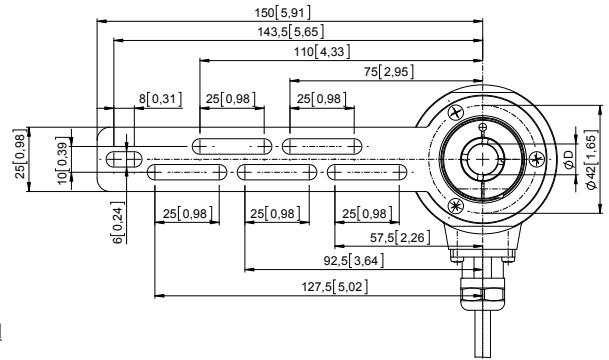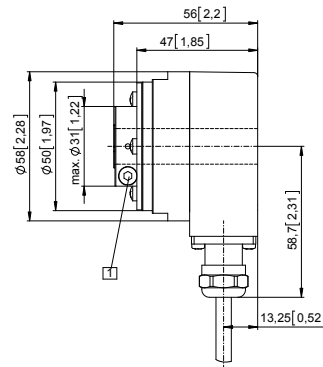

| D | Fit |
|-----------|-----|
| 10 [0.39] | H7 |
| 12 [0.47] | H7 |
| 14 [0.55] | H7 |


(drawing with M12 connector)

- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

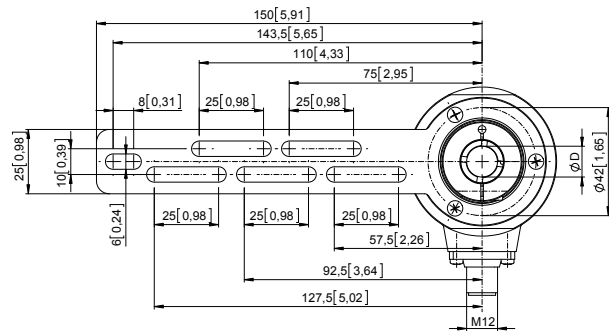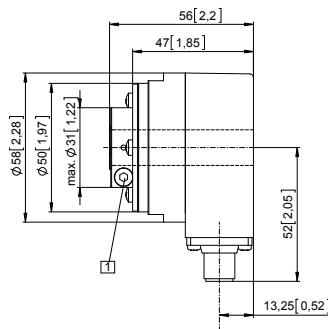

| D | Fit |
|-----------|-----|
| 10 [0.39] | H7 |
| 12 [0.47] | H7 |
| 14 [0.55] | H7 |

Torque pin with rectangular sleeve with M4 thread, 10 [0.39] deep

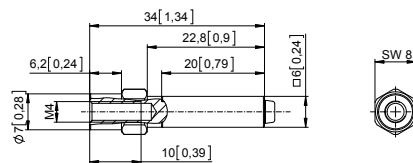

Incremental encoders

| | | |
|--|--|---------------|
| Standard sine wave output, SIL2/PLd, optical | Sendix SIL 5814FS2 / 5834FS2 (shaft / hollow shaft) | SinCos |
|--|--|---------------|

Dimensions hollow shaft version

Dimensions in mm [inch]


Flange with torque stop, flexible

Flange type 9

Through hollow shaft

(drawing with M23 connector)

- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

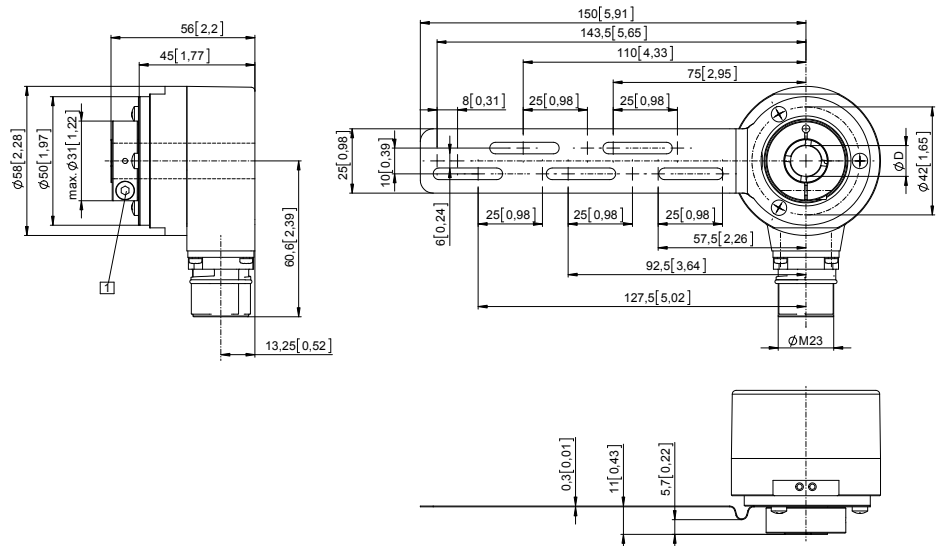

| D | Fit |
|-----------|-----|
| 10 [0.39] | H7 |
| 12 [0.47] | H7 |
| 14 [0.55] | H7 |


Flange with stator coupling, ø 63 [2.48]

Flange type B

Through hollow shaft

(drawing with M23 connector)

- 1 SW 3, recommended torque for the clamping ring 2.5 Nm
- 2 For (4x) M3 screw

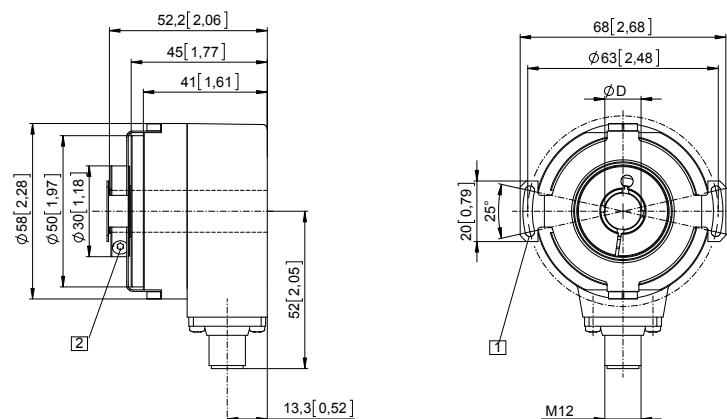

| D | Fit |
|-----------|-----|
| 10 [0.39] | H7 |
| 12 [0.47] | H7 |
| 14 [0.55] | H7 |


Flange with stator coupling, ø 63 [2.48]

Flange type B

Tapered shaft

(drawing with tangential cable outlet)

- 1 For (4x) M3 screw
- 2 Recommended torque for (SW 4) tightening screw 3^{+0.5} Nm

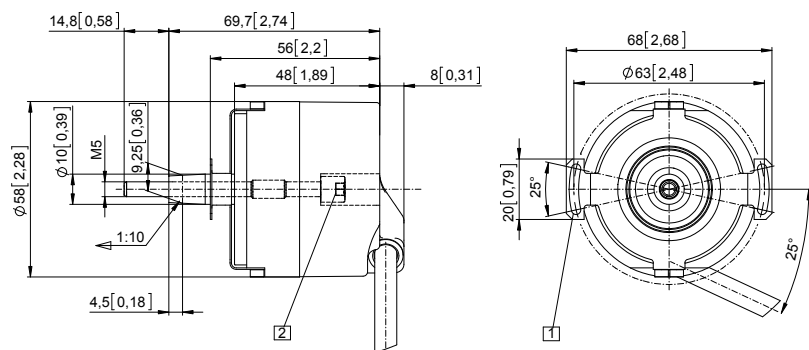

Incremental encoders