


# Absolute encoders - singleturn

Standard optical

Sendix 5853 / 5873 (shaft / hollow shaft)

SSI / BiSS + incremental

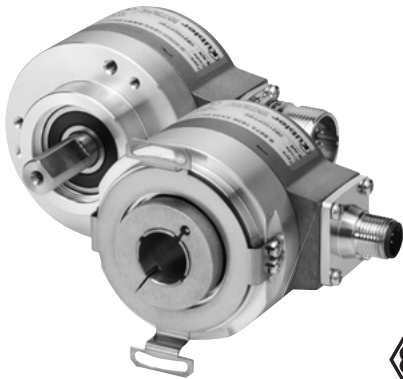

The Sendix 5853 and Sendix 5873 singleturn encoders with optical sensor technology can achieve a resolution of max. 21 bits.

Easy integration in the application thanks to the BiSS interface, with electronic data sheet.


This series offers special versions for use on direct drives for the lift technology.



Electronic data sheet



Safety-Lock™



Temperature range  
-40°...+90°C



High protection level  
IP67



High shaft load capacity



Shock / vibration resistant




Magnetic field proof



Short-circuit proof



Reverse polarity protection



SinCos



Optical sensor

## Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40°C up to +90°C.

## Versatile

- High-precision with a data refresh rate of the position value  $\leq 1\mu s$ .
- High-resolution feedback in real-time via 21 bit fully digital or incremental outputs SinCos and RS422.
- BiSS-C BP3 encoder profile.
- Short control cycles, clock rate with SSI up to 2 MHz / with BiSS up to 10 MHz.

## Order code Shaft version

**8.5853**  
Type

**. X X X X . X X 2 X**  
a b c d e f g

If for each parameter of an encoder the **underlined preferred option** is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



### a Flange

- 1 = clamping flange, IP65  $\varnothing$  58 mm [2.28"]**
- 3 = clamping flange, IP67  $\varnothing$  58 mm [2.28"]
- 2 = synchro flange, IP65  $\varnothing$  58 mm [2.28"]**
- 4 = synchro flange, IP67  $\varnothing$  58 mm [2.28"]
- 5 = square flange, IP65  $\square$  63.5 mm [2.5"]
- 7 = square flange, IP67  $\square$  63.5 mm [2.5"]

### b Shaft ( $\varnothing \times L$ ), with flat

- 1 = 6 x 10 mm [0.24 x 0.39"]<sup>1)</sup>**
- 2 = 10 x 20 mm [0.39 x 0.79"]<sup>2)</sup>**
- 3 = 1/4" x 7/8"
- 4 = 3/8" x 7/8"

### c Interface / power supply

- 1 = SSI, BiSS / 5 V DC
- 2 = SSI, BiSS / 10 ... 30 V DC**
- 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC
- 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
- 5 = SSI, BiSS / 5 V DC, with sensor output
- 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output
- 7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC
- 8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC
- 9 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC, with sensor output

### d Type of connection

- 1 = axial cable, 1 m [3.28'] PVC
- A = axial cable, special length PVC \*)
- 2 = radial cable, 1 m [3.28'] PVC**
- B = radial cable, special length PVC \*)
- 3 = axial M23 connector, 12-pin
- 4 = radial M23 connector, 12-pin**
- 5 = axial M12 connector, 8-pin<sup>3)</sup>
- 6 = radial M12 connector, 8-pin<sup>3)</sup>

\*) Available special lengths (connection types A, B):  
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']  
order code expansion .XXXX = length in dm  
ex.: 8.5853.112A.G323.0030 (for cable length 3 m)

### e Code

- B = SSI, binary
- C = BiSS, binary
- G = SSI, gray**

### g Options (service)

- 1 = no option
- 2 = status LED
- 3 = SET button and status LED**

### f Resolution<sup>4)</sup>

- A = 10 bit
- 1 = 11 bit
- 2 = 12 bit
- 3 = 13 bit**
- 4 = 14 bit
- 7 = 17 bit
- C = 21 bit<sup>5)</sup>

### Optional on request

- Ex 2/22<sup>6)</sup>
- surface protection
- salt spray tested
- other resolutions

1) Preferred type only in conjunction with flange type 2.  
2) Preferred type only in conjunction with flange type 1.  
3) Can be combined only with interface 1 and 2.

4) Resolution, preset value and counting direction factory-programmable.  
5) Only in conjunction with interface 1 or 2 and code C.  
6) For the cable connection type, cable material PUR.

# Absolute encoders - singleturn

<b>Standard optical</b>	<b>Sendix 5853 / 5873 (shaft / hollow shaft)</b>	<b>SSI / BiSS + incremental</b>
-------------------------	--	---------------------------------

<b>Order code</b>	<b>8.5873</b>	<b>.XXXX.XX2X</b>	<p>If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.</p>
<b>Hollow shaft</b>	Type	<div style="display: flex; justify-content: space-around; font-size: small;"> <span>a</span><span>b</span><span>c</span><span>d</span><span>e</span><span>f</span><span>g</span> </div>	
<b>a Flange</b>	<ul style="list-style-type: none"> <li>1 = with spring element, long, IP65</li> <li>2 = with spring element, long, IP67</li> <li>3 = with stator coupling, IP65 ø 65 mm [2.56"]</li> <li>4 = with stator coupling, IP67 ø 65 mm [2.56"]</li> <li><u>5 = with stator coupling, IP65 ø 63 mm [2.48"]</u></li> <li>6 = with stator coupling, IP67 ø 63 mm [2.48"]</li> <li>E = with stator coupling, IP65 mounting without screws <sup>1)</sup></li> <li>F = with stator coupling, IP67 mounting without screws <sup>1)</sup></li> <li>G = with stator coupling, IP65 ø 72 mm [2.83"] <sup>1)</sup></li> <li>H = with expanding coupling, IP65 ø 65 mm [2.56"] <sup>1)</sup></li> </ul>	<ul style="list-style-type: none"> <li><b>c Interface / power supply</b></li> <li>1 = SSI, BiSS / 5 V DC</li> <li><u>2 = SSI, BiSS / 10 ... 30 V DC</u></li> <li>3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC</li> <li>4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC</li> <li>5 = SSI, BiSS / 5 V DC, with sensor output</li> <li>6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output</li> <li>7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC</li> <li>8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC</li> <li>9 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC, with sensor output</li> </ul>	<ul style="list-style-type: none"> <li><b>e Code</b></li> <li>B = SSI, binary</li> <li>C = BiSS, binary</li> <li><u>G = SSI, gray</u></li> </ul>
<b>b Through hollow shaft</b>	<ul style="list-style-type: none"> <li>3 = ø 10 mm [0.39"]</li> <li><u>4 = ø 12 mm [0.47"]</u></li> <li>5 = ø 14 mm [0.55"]</li> <li>6 = ø 15 mm [0.59"]</li> <li>8 = ø 3/8"</li> <li>9 = ø 1/2"</li> <li><i>Tapered shaft</i></li> <li>K = ø 10 mm [0.39"]</li> </ul>	<ul style="list-style-type: none"> <li><b>d Type of connection</b></li> <li>2 = radial cable, 1 m [3.28"] PVC</li> <li>B = radial cable, special length PVC *)</li> <li><u>E = tangential cable, 1 m [3.28"] PVC</u></li> <li>F = tangential cable, special length PVC *)</li> <li><u>4 = radial M23 connector, 12-pin</u></li> <li>6 = radial M12 connector, 8-pin <sup>2)</sup></li> </ul>	<ul style="list-style-type: none"> <li><b>f Resolution <sup>3)</sup></b></li> <li>A = 10 bit</li> <li>1 = 11 bit</li> <li>2 = 12 bit</li> <li><u>3 = 13 bit</u></li> <li>4 = 14 bit</li> <li>7 = 17 bit</li> <li>C = 21 bit <sup>4)</sup></li> </ul>
<b>*) Available special lengths (connection types B, F):</b>		<ul style="list-style-type: none"> <li>2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']</li> <li>order code expansion .XXXX = length in dm</li> <li>ex.: 8.5873.542B.G323.0030 (for cable length 3 m)</li> </ul>	
<b>Optional on request</b>		<ul style="list-style-type: none"> <li>- Ex 2/22 (not with type of connection E or F) <sup>5)</sup></li> <li>- surface protection</li> <li>- salt spray tested</li> <li>- other resolutions</li> </ul>	

Absolute encoders singleturn

Mounting accessory for shaft encoders	Order no.
<b>Coupling</b>	
bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]	<b>8.0000.1102.0606</b>
bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	<b>8.0000.1102.1010</b>
Mounting accessory for hollow shaft encoders	Order no.
<b>Cylindrical pin, long</b>	
for flange with spring element (flange type 1 + 2)	
with fixing thread	<b>8.0010.4700.0000</b>
Connection technology	Order no.
<b>Cordset, pre-assembled</b>	
M12 female connector with coupling nut, 8-pin 2 m [6.56'] PVC cable	<b>05.00.6041.8211.002M</b>
M23 female connector with coupling nut, 12-pin 2 m [6.56'] PVC cable	<b>8.0000.6901.0002.0031</b>
<b>Connector, self-assembly (straight)</b>	
M12 female connector with coupling nut, 8-pin	<b>05.CMB 8181-0</b>
M23 female connector with coupling nut, 12-pin	<b>8.0000.5012.0000</b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

1) Can be combined only with shaft K and type of connection E or F.  
 2) Can be combined only with interface 1 and 2.  
 3) Resolution, preset value and counting direction factory-programmable.

4) Only in conjunction with interface 1 or 2 and code C.  
 5) For the cable connection type, cable material PUR.

# Absolute encoders - singleturn

<b>Standard optical</b>	<b>Sendix 5853 / 5873 (shaft / hollow shaft)</b>	<b>SSI / BiSS + incremental</b>
-------------------------	--	---------------------------------

## Technical data

Mechanical characteristics		
<b>Maximum speed shaft version</b>		
IP65 up to 70°C [158°F]	12000 min <sup>-1</sup> , 10000 min <sup>-1</sup> (continuous)	
IP65 up to T <sub>max</sub>	8000 min <sup>-1</sup> , 5000 min <sup>-1</sup> (continuous)	
IP67 up to 70°C [158°F]	11000 min <sup>-1</sup> , 9000 min <sup>-1</sup> (continuous)	
IP67 up to T <sub>max</sub>	8000 min <sup>-1</sup> , 5000 min <sup>-1</sup> (continuous)	
<b>Maximum speed hollow shaft version</b>		
IP65 up to 70°C [158°F]	9000 min <sup>-1</sup> , 6000 min <sup>-1</sup> (continuous)	
IP65 up to T <sub>max</sub>	6000 min <sup>-1</sup> , 3000 min <sup>-1</sup> (continuous)	
IP67 up to 70°C [158°F]	8000 min <sup>-1</sup> , 4000 min <sup>-1</sup> (continuous)	
IP67 up to T <sub>max</sub>	4000 min <sup>-1</sup> , 2000 min <sup>-1</sup> (continuous)	
<b>Starting torque at 20°C [68°F]</b>	IP65	< 0.01 Nm
	IP67	< 0.05 Nm
<b>Mass moment of inertia</b>		
	shaft version	3.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
	hollow shaft version	6.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
<b>Load capacity of shaft</b>		
	radial	80 N
	axial	40 N
<b>Weight</b>		
		approx. 0.35 kg [12.35 oz]
<b>Protection acc. to EN 60529</b>		
	housing side	IP67
	shaft side	IP65, opt. IP67
<b>Working temperature range</b>		
		-40°C ... +90°C [-40°F ... +194°F] <sup>1)</sup>
<b>Materials</b>		
	shaft/hollow shaft	stainless steel
	flange	aluminum
	housing	zinc die-cast
	cable	PVC (PUR for Ex 2/22)
<b>Shock resistance acc. EN 60068-2-27</b>		
		2500 m/s <sup>2</sup> , 6 ms
<b>Vibration resistance acc. EN 60068-2-6</b>		
		100 m/s <sup>2</sup> , 55 ... 2000 Hz

Electrical characteristics		
<b>Power supply</b>		
		5 V DC (+5 %) or 10 ... 30 V DC
<b>Current consumption (no load)</b>		
	5 V DC	max. 70 mA
	10 ... 30 V DC	max. 45 mA
<b>Reverse polarity protection of the power supply</b>		
		yes
<b>Short circuit proof outputs</b>		
		yes <sup>2)</sup>
<b>UL approval</b>		
		file 224618
<b>CE compliant acc. to</b>		
		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

SSI interface		
<b>Output driver</b>		
		RS485 transceiver type
<b>Permissible load / channel</b>		
		max. +/- 20 mA
<b>Signal level</b>		
	HIGH	typ. 3.8 V
	LOW at I <sub>Load</sub> = 20 mA	typ. 1.3 V
<b>Resolution</b>		
		10 ... 14 bit and 17 bit
<b>Code</b>		
		binary or gray
<b>SSI clock rate</b>		
		50 kHz ... 2 MHz
<b>Data refresh rate</b>		
	ST resolution ≤ 14 bit	≤ 1 μs
	ST resolution ≥ 15 bit	4 μs
<b>Monoflop time</b>		
		≤ 15 μs
<b>Note:</b> If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.		

BiSS interface		
<b>Output driver</b>		
		RS485 transceiver type
<b>Permissible load / channel</b>		
		max. +/- 20 mA
<b>Signal level</b>		
	HIGH	typ. 3.8 V
	LOW at I <sub>Load</sub> = 20 mA	typ. 1.3 V
<b>Resolution</b>		
		10 ... 14 bit; 17, 19 and 21 bit
<b>Code</b>		
		binary
<b>Clock rate</b>		
		50 kHz ... 10 MHz
<b>Max. update rate</b>		
		< 15 μs, depends on the clock rate and the data length
<b>Data refresh rate</b>		
	ST resolution ≤ 14 bit	≤ 1 μs
	ST resolution 17 bit	2.4 μs
	ST resolution 21 bit	4 μs
<b>Protocol</b>		
		BiSS-C BP3 encoder profile
<b>Note:</b>		
	–	Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings
	–	CRC data verification
	–	EDS (electronic data sheet)

Status output and LED		
<b>Output driver</b>		
		open collector, internal pull up resistor 22 kOhm
<b>Permissible load</b>		
		max. 20 mA
<b>Signal level</b>		
	HIGH	+V
	LOW	< 1 V
<b>Active</b>		
		LOW
The optional LED (red) and the status output serve to display various alarm or error messages. In normal operation the LED is OFF and the status output is HIGH (Open Collector with int. pull-up 22 kOhm).		
An active status output (LOW) displays:		
	–	Sensor error, singleturn or multeturn (soiling, glass breakage etc.)
	–	LED fault (failure or ageing)
	–	over- or under-temperature
In the SSI mode, the fault indication can only be reset by switching off the power supply to the device.		

Option incremental outputs (A/B), 2048 ppr		
	SinCos	RS422 TTL compatible
<b>Max. frequency -3dB</b>	400 kHz	400 kHz
<b>Signal level</b>	1 V <sub>pp</sub> (±20 %)	HIGH: min. 2.5 V LOW: max. 0.5 V
<b>Short circuit proof</b>	yes	yes

1) Cable version: -30°C ... +75°C [-22°F ... +167°F].  
2) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied.

# Absolute encoders - singleturn

<b>Standard optical</b>	<b>Sendix 5853 / 5873 (shaft / hollow shaft)</b>	<b>SSI / BiSS + incremental</b>
-------------------------	--	---------------------------------

SET input or SET button	
<b>Input</b>	active HIGH
<b>Input type</b>	comparator
<b>Signal level</b>	HIGH min: 60 % of +V (power supply) max: +V
	LOW max: 25 % of +V (power supply)
<b>Input current</b>	< 0.5 mA
<b>Min. pulse duration (SET)</b>	10 ms
<b>Timeout after SET signal</b>	14 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar).

Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approx. 15 ms before the new position data can be read. During this time the status output is at LOW.

If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

DIR input	
Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The status output will switch to LOW.	
If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.	
<b>Response time (DIR input)</b>	1 ms

Power-ON	
After Power-ON the device requires a time of approx. 150 ms before valid data can be read.	
Hot plugging of the encoder should be avoided.	

Absolute encoders  
singleturn

# Absolute encoders - singleturn

**Standard optical**

**Sendix 5853 / 5873 (shaft / hollow shaft)**


**SSI / BiSS + incremental**

## Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
1, 2	1, 2, A, B, E, F	SET, DIR, Status	Signal: 0 V +V C+ C- D+ D- SET DIR Stat N/C N/C N/C $\perp$
			Cable color: WH BN GN YE GY PK BU RD BK - - - shield
M23 connector, 12-pin			
1, 2	3, 4	SET, DIR, Status	Signal: 0 V +V C+ C- D+ D- SET DIR Stat N/C N/C N/C $\perp$
			Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Cable (isolate unused wires individually before initial start-up)			
5	1, 2, A, B, E, F	SET, DIR, Status sensor output	Signal: 0 V +V C+ C- D+ D- SET DIR Stat N/C 0Vsens +Vsens $\perp$
			Cable color: WH BN GN YE GY PK BU RD BK - GY-PK RD-BU shield
M23 connector, 12-pin			
5	3, 4	SET, DIR, Status sensor output	Signal: 0 V +V C+ C- D+ D- SET DIR Stat N/C 0Vsens +Vsens $\perp$
			Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Cable (isolate unused wires individually before initial start-up)			
3, 4, 7, 8	1, 2, A, B, E, F	SET, DIR, SinCos or incr. RS422	Signal: 0 V +V C+ C- D+ D- SET DIR A $\bar{A}$ B $\bar{B}$ $\perp$
			Cable color: WH BN GN YE GY PK BU RD BK VT GY-PK RD-BU shield
M23 connector, 12-pin			
3, 4, 7, 8	3, 4	SET, DIR, SinCos or incr. RS422	Signal: 0 V +V C+ C- D+ D- SET DIR A $\bar{A}$ B $\bar{B}$ $\perp$
			Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Cable (isolate unused wires individually before initial start-up)			
6, 9	1, 2, A, B, E, F	SinCos o. incr. RS422 sensor output	Signal: 0 V +V C+ C- D+ D- A $\bar{A}$ B $\bar{B}$ 0Vsens +Vsens $\perp$
			Cable color: WH BN GN YE GY PK BU RD BK VT GY-PK RD-BU shield
M23 connector, 12-pin			
6, 9	3, 4	SinCos o. incr. RS422 sensor output	Signal: 0 V +V C+ C- D+ D- A $\bar{A}$ B $\bar{B}$ 0Vsens +Vsens $\perp$
			Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
M12 connector, 8-pin			
1, 2	5, 6	SET, DIR	Signal: 0 V +V C+ C- D+ D- SET DIR $\perp$
			Pin: 1 2 3 4 5 6 7 8 PH

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- 0 Vsens / +Vsens: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
- C+, C-: Clock signal
- D+, D-: Data signal
- A,  $\bar{A}$ : Incremental output channel A (cosine)
- B,  $\bar{B}$ : Incremental output channel B (sine)
- SET: Set input
- DIR: Direction input
- Stat: Status output
- PH  $\perp$ : Plug connector housing (shield)

### Top view of mating side, male contact base

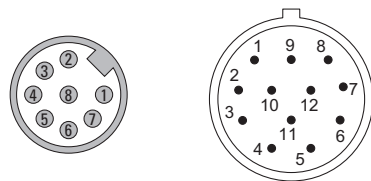

M12 connector, 8-pin

M23 connector, 12-pin

# Absolute encoders - singleturn

<b>Standard optical</b>	<b>Sendix 5853 / 5873 (shaft / hollow shaft)</b>	<b>SSI / BiSS + incremental</b>
-------------------------	--	---------------------------------

## Dimensions shaft version


Dimensions in mm [inch]

### Clamping flange, $\varnothing$ 58 [2.28]

#### Flange type 1 and 3

(drawing with M23 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

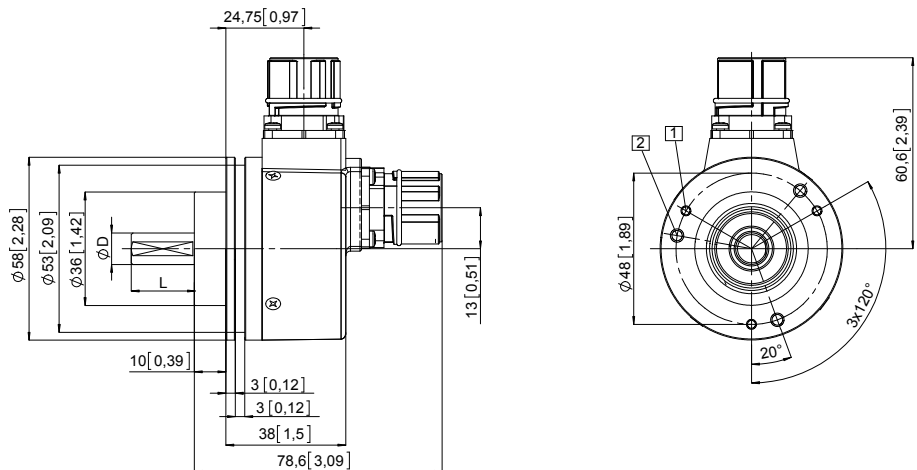


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h8	7/8"
3/8"	h8	7/8"

### Synchro flange, $\varnothing$ 58 [2.28]

#### Flange type 2 and 4

(drawing with M12 connector)

- 1 3 x M4, 6 [0.24] deep

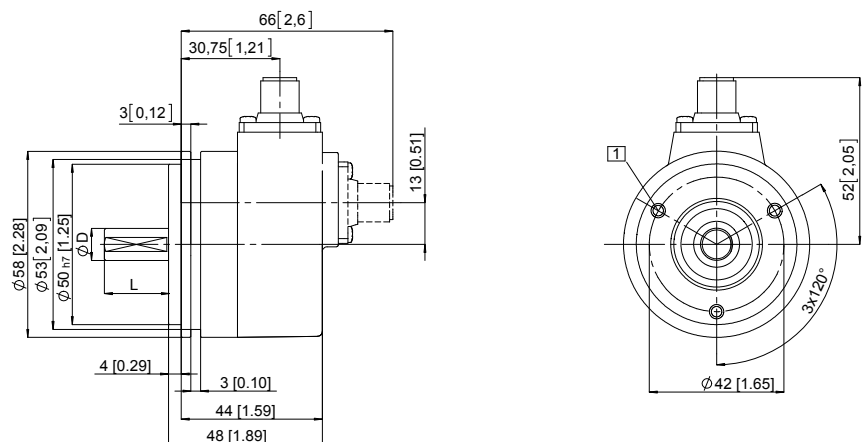


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h8	7/8"
3/8"	h8	7/8"

### Square flange, $\square$ 63.5 [2.5]

#### Flange type 5 and 7

(drawing with cable)

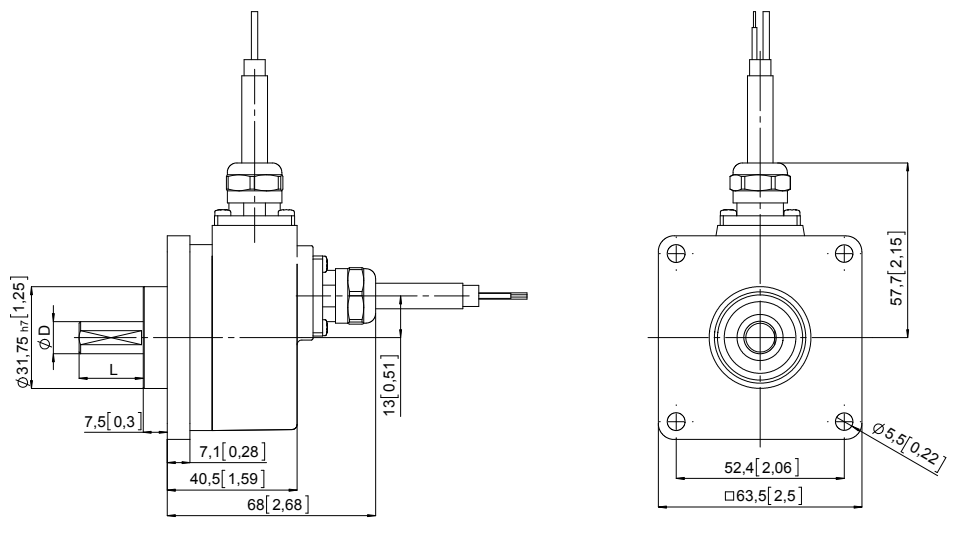

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h8	7/8"
3/8"	h8	7/8"

# Absolute encoders - singleturn

**Standard optical**

**Sendix 5853 / 5873 (shaft / hollow shaft)**

**SSI / BiSS + incremental**


## Dimensions hollow shaft version

Dimensions in mm [inch]

### Flange with spring element, long Flange type 1 and 2

(drawing with M12 connector)

- 1 Slot spring element, recommendation: cylindrical pin DIN 7,  $\varnothing 4$  [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Status-LED
- 4 SET button
- 5 Recommended torque for the clamping ring 0.6 Nm

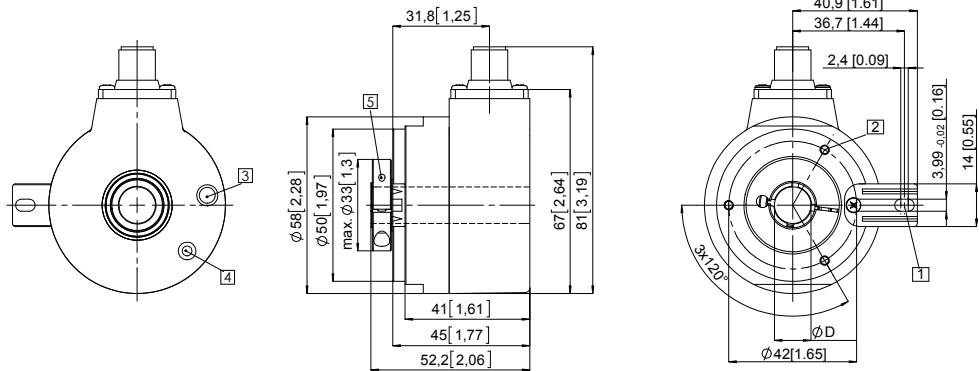

D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
3/8"	H7
1/2"	H7


### Flange with stator coupling, $\varnothing 65$ [2.56]

#### Flange type 3 and 4

Pitch circle diameter for fixing screws 65 [2.56]

(drawing with cable)

- 1 Fixing screws DIN 912 M3 x 8 (washer included in delivery)
- 2 Recommended torque for the clamping ring 0.6 Nm

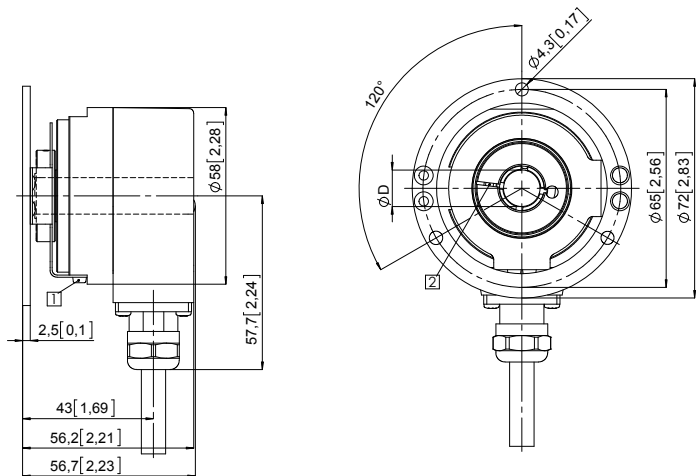

D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
3/8"	H7
1/2"	H7


### Flange with stator coupling, $\varnothing 63$ [2.48]

#### Flange type 5 and 6

Pitch circle diameter for fixing screws 63 [2.48]

(drawing with M23 connector)

- 1 Fixing screws DIN 912 M3 x 8 (washer included in delivery)
- 2 Recommended torque for the clamping ring 0.6 Nm

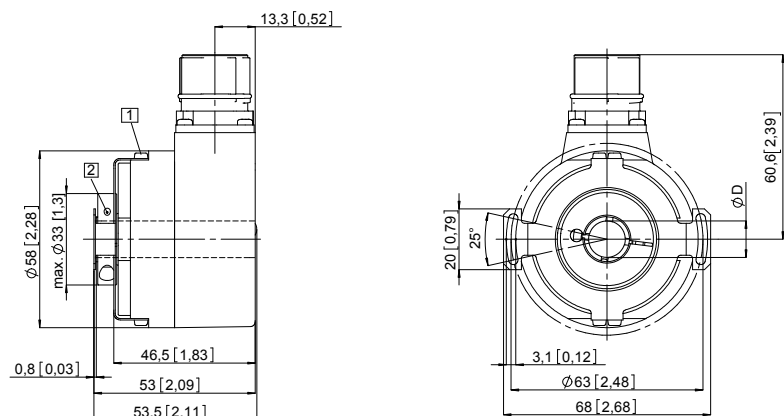

D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
3/8"	H7
1/2"	H7

# Absolute encoders - singleturn

<b>Standard optical</b>	<b>Sendix 5853 / 5873 (shaft / hollow shaft)</b>	<b>SSI / BiSS + incremental</b>
-------------------------	--	---------------------------------

## Dimensions hollow shaft version


Dimensions in mm [inch]

### Flange with stator coupling, mounting without screws

#### Flange type E and F

(with tapered shaft K and tangential cable)

- 1 Status LED
- 2 SET button
- 3 Recommended torque for (SW 4) tightening screw  $3^{+0.5}$  Nm

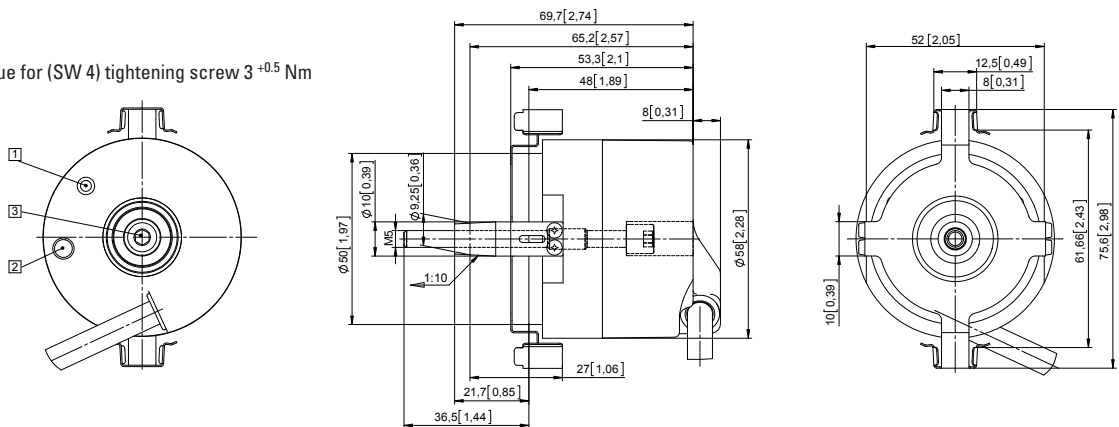


### Flange with stator coupling, ø 72 [2.83]

#### Flange type G

(with tapered shaft K and tangential cable)

- 1 Status LED
- 2 SET Button
- 3 Recommended torque for (SW 4) tightening screw  $3^{+0.5}$  Nm

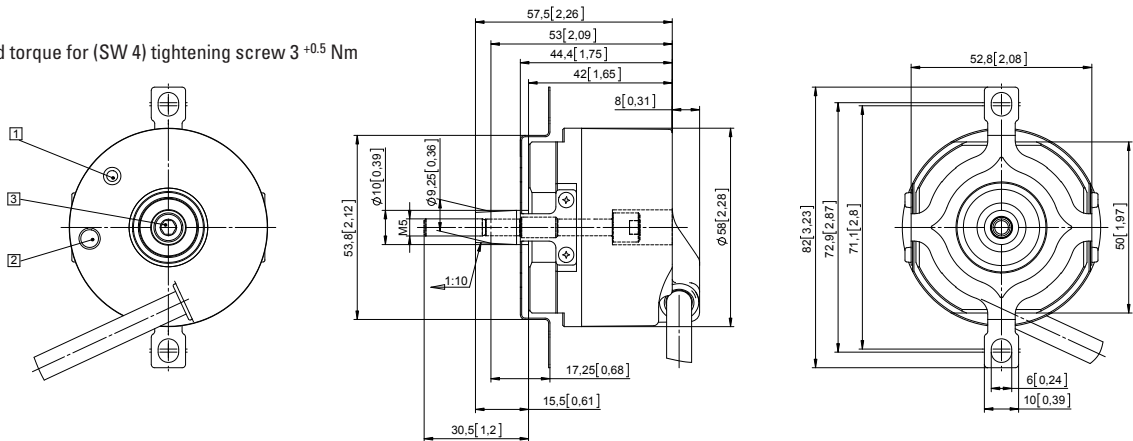

### Flange with expanding coupling, ø 65 [2.56"]

#### Flange type H

- 1 Status-LED
- 2 SET button
- 3 Recommended torque for (SW 4) tightening screw  $3^{+0.5}$  Nm
- 4 Recommended torque for (SW 2) tightening screw 1 Nm

