

Palm grip B28



The palm grip B28 has different equipment options for many requirements. It is compatible with our multi-axis and single-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1mm², 450mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 10mm (standard).


Technical data

Operating temperature	-40°C to +60°C
Degree of protection	IP54




		Example			
		B28	- 2D	SE	- X
Basic unit					
B28	Palm grip				
Digital actuating element					
D	Push button (1,5A 24V DC13)				
	Colour: red, black, yellow, green, blue, grey				
SE	Sensor button capacitive with external control electronics				
S	Sensor button capacitive without external control electronics				
	(Consistent with V85/VV85 and V25 with interface E3xx+E4xx+E5xx+E6xx)				
Special model					
X	Special / customer specified				

Edition:
Push button installed
Pos. 1,3,4,6,7,8
Sensor button function on left or right available

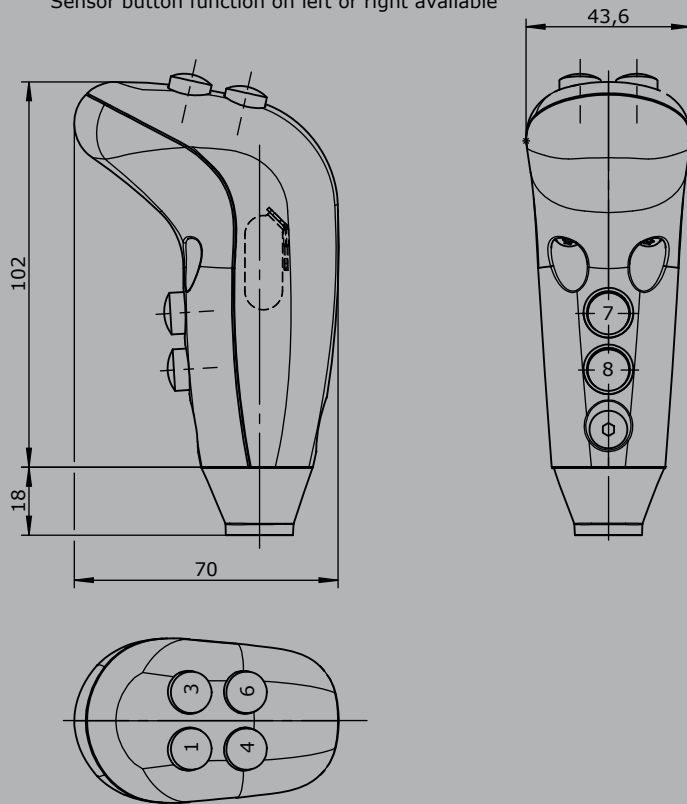

Edition:
Push button installed
Pos. 2,5,7,8
Sensor button function on left or right available



Edition:
Push button installed
Pos. 7,8,9,10
Sensor button function on left or right available

